

⚠ WARNING

**DISCONNECT POWER BEFORE RE-LAMPING OR WIRING THE FIXTURE
READ ALL INSTRUCTIONS COMPLETELY BEFORE STARTING INSTALLATION.**

⚠ CAUTION

- TO AVOID THE RISK OF FIRE OR SHOCK, FIXTURE MUST BE INSTALLED IN COMPLIANCE WITH ALL APPLICABLE NATIONAL AND LOCAL ELECTRICAL/BUILDING CODES.
- INSTALLATION AND MAINTENANCE OF THIS UNIT REQUIRES AN ELECTRICIAN OR CERTIFIED FACTORY TRAINED TECHNICIAN.
- If an existing fixture is being replaced, remove it and note to which of the wires in the outlet box the fixture was attached. DO NOT SEPARATE ANY OTHER WIRES THAT MAY BE IN THE BOX. DO NOT DAMAGE THE INSULATION OF OLDER WIRING. In regular circumstances the BLACK wire will be the "Hot" lead and the WHITE wire will be the "Neutral" or "Common" lead A GREEN or BARE COPPER wire is the "Ground". In older buildings it is always good practice to reconfirm the polarity of the wiring.

NOTICE

- The important safeguards and instructions outlined on this sheet cannot cover all possible conditions and situations that may occur. It must be understood that common sense, caution and care factors that cannot be built into any product. Caution and care must be supplied by the person(s) installing, operating and caring of this lighting fixture.
- This fixture is designed to be mounted on a correctly installed standard round or octagon box or a through wiring box with a plaster frame. The box must be securely mounted to the structure of the building. The crossbar and hardware supplied should be used. Directly mounting the fixture to the outlet box may make it impossible to correctly align the fixture.

FIXTURE PREPARATION

1. Remove the fixture, shell/crystal strands, parts and parts bag(s) from the carton.

NOTICE:

Before discarding the carton, double check to make certain that all parts are found.

2. Assemble the stems or loops to the fixture.

NOTICE:

This fixture can be installed using the following stems only:
(1) Stems w/ one link of joining chain (2) Stems w/ more than one joining chain for extra length or (3) chains only.

FIXTURE INSTALLATION

1. Attach the crossbar to the outlet box. (The green screw should face the floor).

NOTICE:

THIS LUMINAIRE MUST BE MOUNTED OR SUPPORTED INDEPENDENTLY OF AN OUTLET BOX.

2. Thread the hex nut onto the nipple and the nipple into the crossbar. Place the canopy over the nipple and against the ceiling. Adjust the nipple so that 1/4" of threads extend beyond the canopy. Tighten the hex nut against the crossbar. Using the cap nut and washer, temporarily install the canopy.

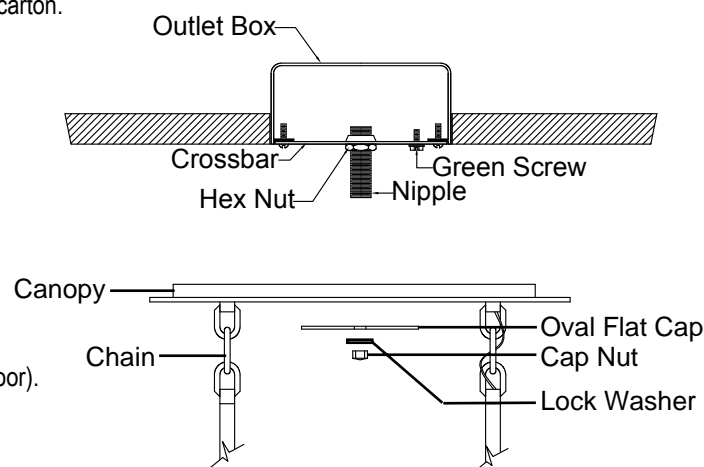


Figure-1

3. Open the end links of the chains and attach the chains to the canopy loops. Hang the fixture on the chains and adjust up to the desired height. Remove excess chains. Close all chains links.

⚠ WARNING


The use of chain pliers for opening and closing links of chain is required. The use of tools other than chain pliers may damage the chain link resulting in a failure which can cause harm to the fixture, property, and/or person(s). TIP: If using regular pliers to close the link, place a cloth around the link or wrap the jaws of the pliers with tape to minimize damage to the finish.

4. Thread the lead wires and ground wire up through the alternating links of the chain until the ceiling is reached.
5. Remove the fixture from the outlet box.
6. Measure 8" of lead and ground wire beyond the top of the chain. Cut off the excess wire. Strip the insulation off the ends of the leads exposing approximately 1/2" of wire. Twist the strands of wire together. Push the leads and ground wire through the loop and into the canopy.
7. Fasten the ground wire to the green or bare copper wire in the outlet box or the green screw on the crossbar.

⚠ WARNING

Never fasten the ground wire to the black or "hot" wire. Failure to follow this instruction could result in serious injury or death!

8. Fasten the white fixture lead to the white wire in the outlet box. Fasten the wires together with an approved fastener (wire nut). Starting about 1" below the fastener, tightly wrap the connection with electrical tape so that the connections seals the end of the fastener.

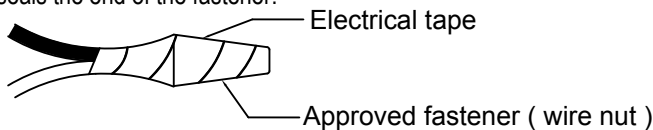

⚠ WARNING



Make sure that there is no exposed wire or strands that could cause a dangerous short circuit!

9. Connect the black fixture lead to the black wire in the outlet box. Fasten the joined wires as in step 8.
10. Using the cap nut and washer, loosely fasten the fixture to the outlet box. Adjust the orientation of the fixture and tighten the cap nut to secure the canopy to the ceiling.
11. Place the sleeves onto the canopy.
12. Install the capiz and crystal chains as indicated on the third page of this instruction sheet.
13. Install the lamps (light bulbs).
NOTE: This fixture is rated for 60 watt type B, BA, C or CA lamps.

⚠ WARNING

DO NOT EXCEED RECOMENDED WATTAGE!

14. Restore power to circuit at breaker or fuse box.

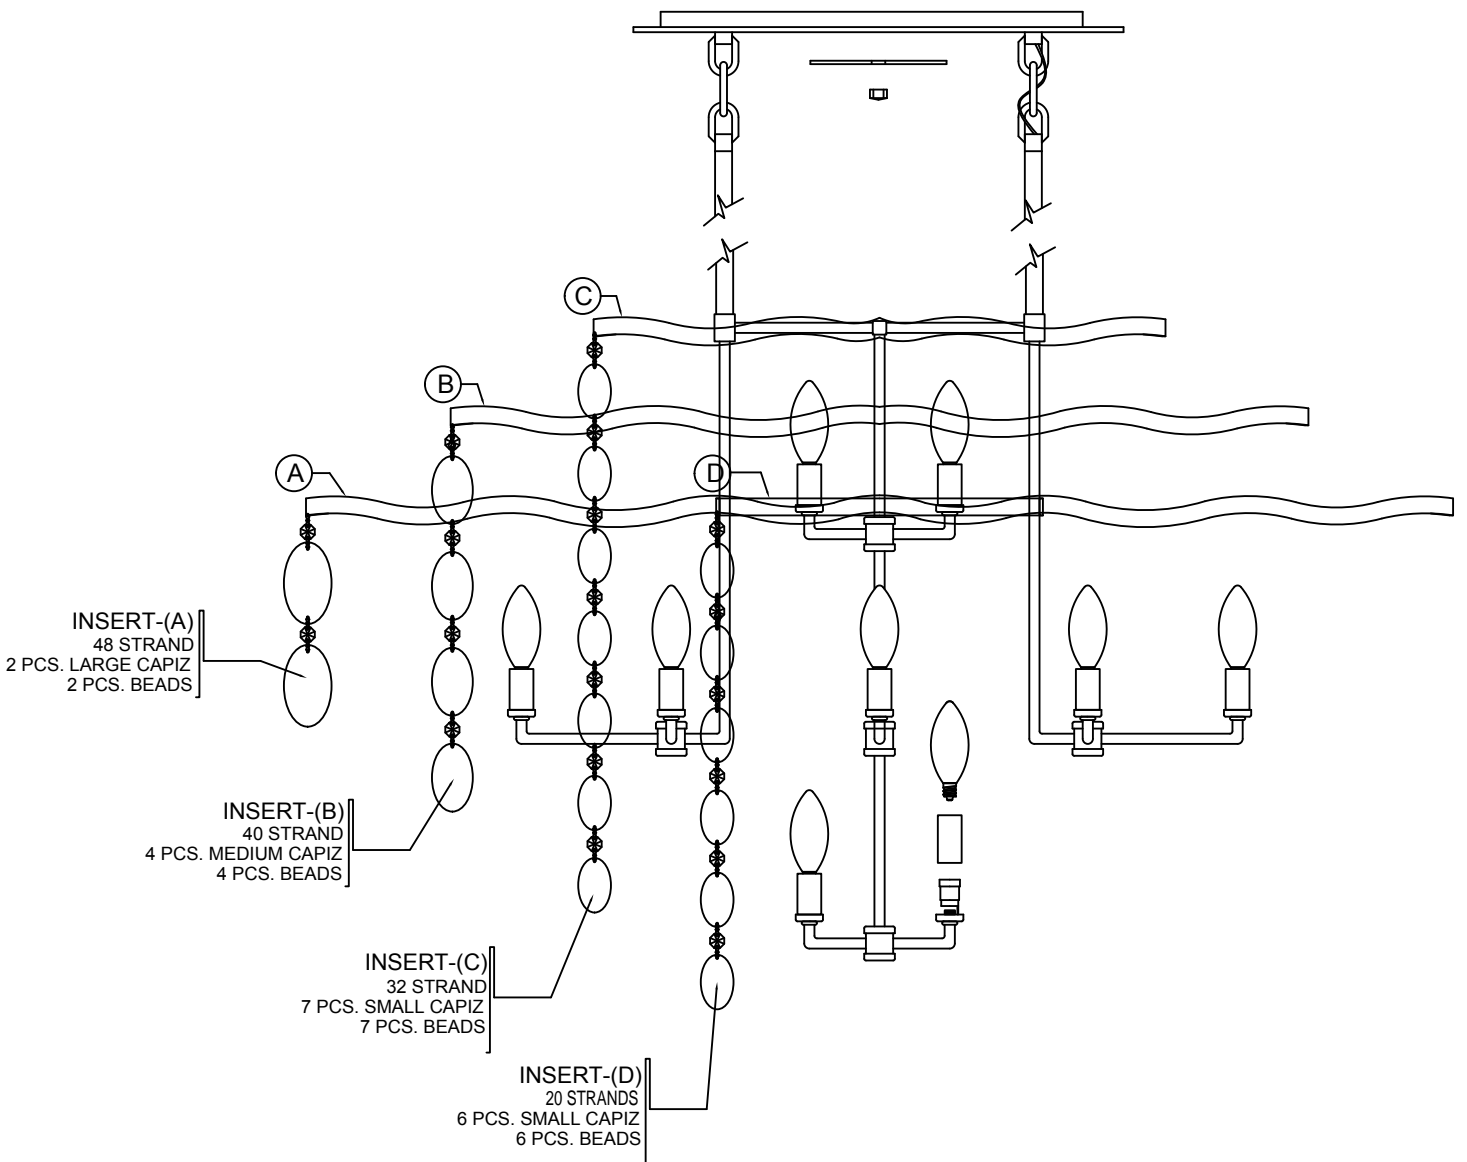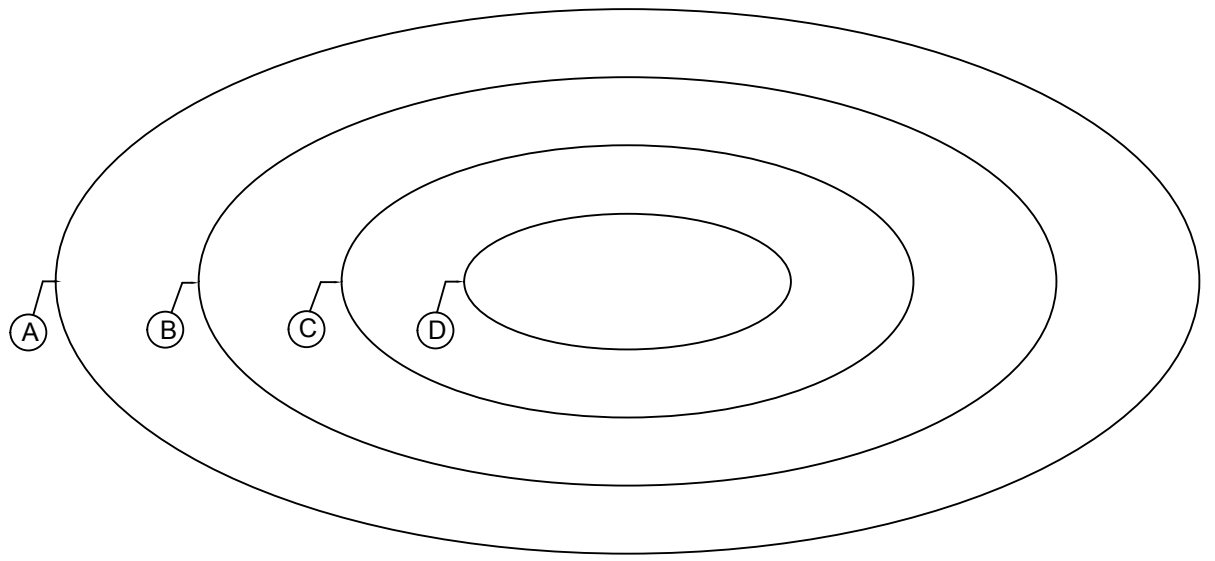

INSERT-(A)
 48 STRAND
 2 PCS. LARGE CAPIZ
 2 PCS. BEADS

INSERT-(B)
 40 STRAND
 4 PCS. MEDIUM CAPIZ
 4 PCS. BEADS

INSERT-(C)
 32 STRAND
 7 PCS. SMALL CAPIZ
 7 PCS. BEADS

INSERT-(D)
 20 STRANDS
 6 PCS. SMALL CAPIZ
 6 PCS. BEADS