



# LED Wraparound LWL Series

## Features

This low profile, clean appearance, surface mounted wrap provides a wide distribution of light with a frosted white prismatic lens. It can be used in various applications including offices, corridors, garages, kitchens and public spaces. Fixture mounts to standard junction box (not included).

## Construction

Housing is die-formed of 22-gauge steel. Standard mounting holes are included. Power supply connections can be made inside the fixture wire way or in a junction box (not included).

## Finish

Housing is finished in lighting grade white baked gloss enamel paint.

## Diffuser

Frosted white prismatic diffuser is made of engineered LED acrylic material.

## Electrical

### D1 Driver

Direct wired with a constant current low voltage electronic LED driver rated at 120 VAC. The driver is dimmable with a 2-wire (Triac) or electronic low voltage (ELV) dimmer switch.

### D2 Driver

Direct wired with a constant current low voltage electronic LED driver rated for 120-277 VAC. LED driver is dimmable 0-10V DC.

### MV Driver

Direct wired with a constant current low voltage electronic LED driver rated for 120-277 VAC. Non dimmable, only comes with 80 CRI LEDs.

**D1**  
Forward phase cut dimmer  
DVCL-153P Lutron®

**D2**  
120-277V  
IP-710-DL Leviton®



## Lamping

50,000 hr. long life replaceable LEDs produce 2500, 3000 or 5000 source lumens. 3000K or 4000K color temperature, 90 CRI min.


## Certification

cETLus listed for damp locations.  
ENERGY STAR® Qualified (with the exception of MV models)  
\*CA Title 24-DA8-2016 Compliant-pending

## Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date-of-purchase.

Specifications and dimensions subject to change without notice.

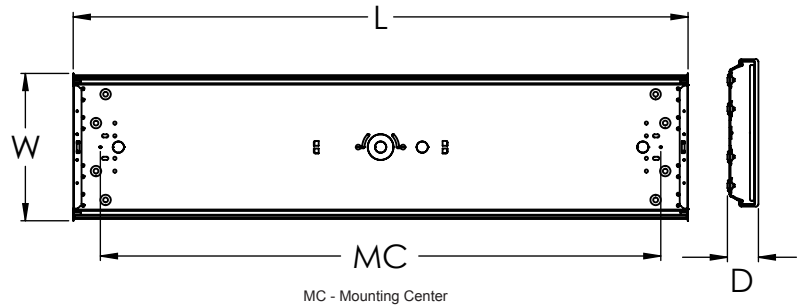

## Ordering Information:

Warm White	LED	Source Lumens	CCT	L	W	H
LWL07242500L30D1	30W	2500	3000K	24"	7"	2-3/8"
*LWL07483000L30D1	36W	3000	3000K	48"	7"	2-3/8"
LWL07485000L30D1	60W	5000	3000K	48"	7"	2-3/8"
LWL07242500L30D2	30W	2500	3000K	24"	7"	2-3/8"
*LWL07483000L30D2	36W	3000	3000K	48"	7"	2-3/8"
*LWL07485000L30D2	60W	5000	3000K	48"	7"	2-3/8"

Cool White	LED	Source Lumens	CCT	L	W	H
LWL07242500L40D1	30W	2500	4000K	24"	7"	2-3/8"
*LWL07483000L40D1	36W	3000	4000K	48"	7"	2-3/8"
LWL07483600L40MV	30W	3600	4000K	48"	7"	2-1/2"
LWL07485000L40D1	60W	5000	4000K	48"	7"	2-3/8"
LWL07242500L40D2	30W	2500	4000K	24"	7"	2-3/8"
LWL07483000L40D2	36W	3000	4000K	48"	7"	2-3/8"
LWL07485000L40D2	60W	5000	4000K	48"	7"	2-3/8"
LWL13487200L40MV	52W	6200	4000K	48"	11-1/2"	2-1/2"