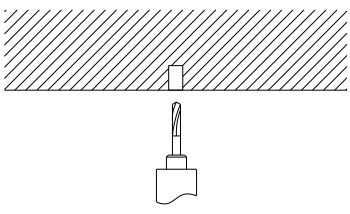
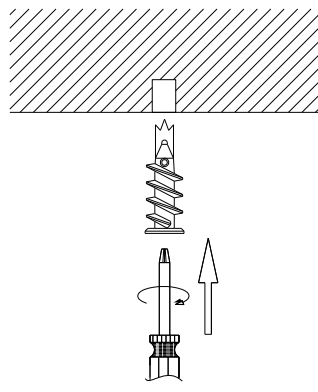


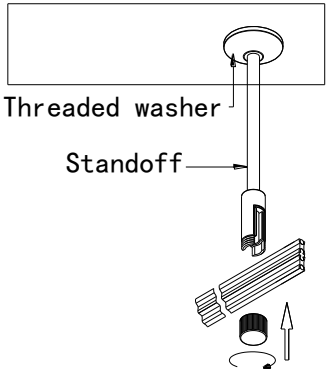


## Installing or adjusting Standoff GKST1000/GKST1001

The standoff uses the quick adapter to attach to the rail, and adjust the standoff for you want. Follow the step-by-step instructions below.

				
<p>Step 1. Line up the drywall anchors with the marks on the ceiling and use a hammer to tap the anchor approximately 1/2" into the ceiling. Stop just before the threaded portion of the anchor enters the ceiling.</p>	<p>Step 2. Finish the installation using a screw driver to screw the anchor until it is flush to the ceiling.</p>	<p>Step 3. Secure a threaded washer to the anchor by driving a screw into the anchor.</p>	<p>Step 4. Screw the standoff assembly to the threaded washer.</p>	<p>Step 5. Remove the Standoff cap. Slide the Rail into the Standoff. While supporting the Rail, screw the Standoff Cap back onto the Standoff.</p>