


PRODUCT NAME:ADDRESS LIGHT

ITEM NUMBER: 53650 53651

Please consult a qualified electrician for hanging fixture and wiring!

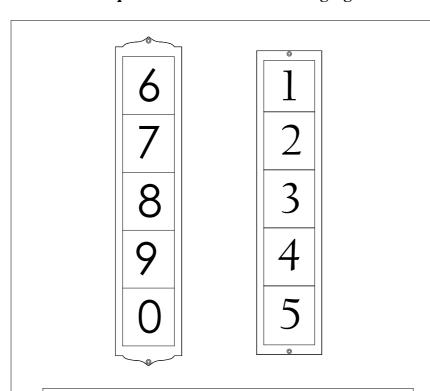

To prevent water intrusion, caulk around back-frame where fixture meets the wall using outdoor silicone sealant, Leave a small gap at the bottom to allow moisture to escape.


Warning: Address Lights operate on low voltage ($12V^224V$ ac) only, Connect fixture to low voltage transformer. Failure to do so may damage the unit or surrounding area.


2*2.75W LED


Before installing the light, please unpack the package box and make sure all parts available as picture below and right parts showed.

Frame.






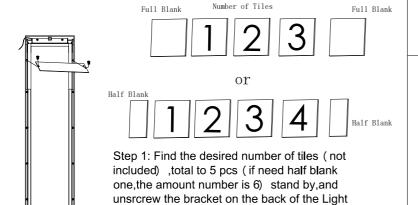


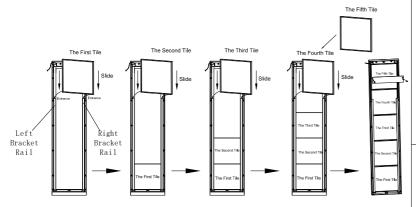

Step 2: As above left, slide the first number into, from the entrance of left bracket rail and right bracket rail between, and then gradually slide down the rest of all number tiles one by one. Finally, screw on the bracket to fix the fourth and fifth number tiles as above right insturction.



Step 3: the nuber can intall both directions vertically and horizontally as above style. If any misspelling, proceed to step 2 till the number as desired arrangement.



Step 4: turn the light back to front, and wiring the White wire to neutal of power supply, Black wire to Live of power supply.

Warning: Before wiring,make sure the transform is correct for input voltage,otherwise,it burn the light!

Step 5: Mark where anchors should be attached to building surface. Attach the Light frame assembly to surface with two tapping screws provided through holes in front of light frame.

Step 6: Check the transformer again, Make sure all electrical wiring under requirements of correct 12~24V voltage, and turn on the switch.

