

Installation Instructions for
**Barn Light Dome & Barn Light
I Light Flush Mount**

990C783_01-BRN

7836701, 7837401 | 1.0

GENERATION LIGHTING
CEILING

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.



This instruction shows a typical installation.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


Use minimum 90°c supply conductors.

SAVE THESE INSTRUCTIONS!

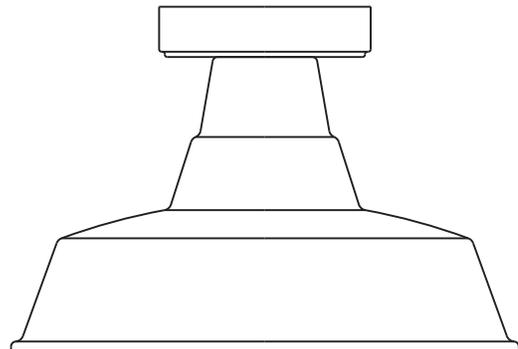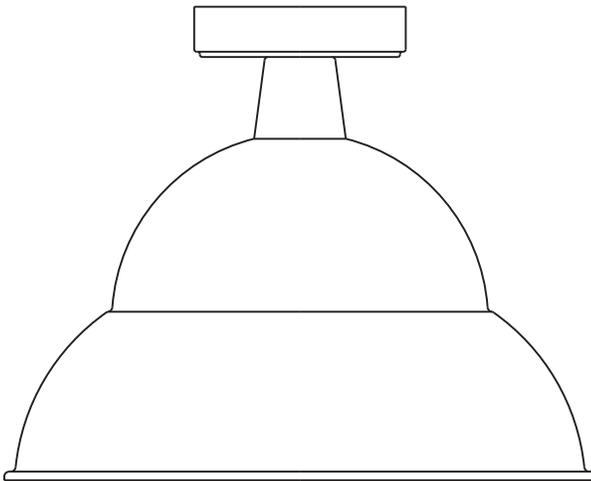

GENERATION LIGHTING
7400 Linder Ave., Skokie, IL 60077
T 847.410.4400 | F 847.410.4500
www.generationlighting.com

Install the Fixture

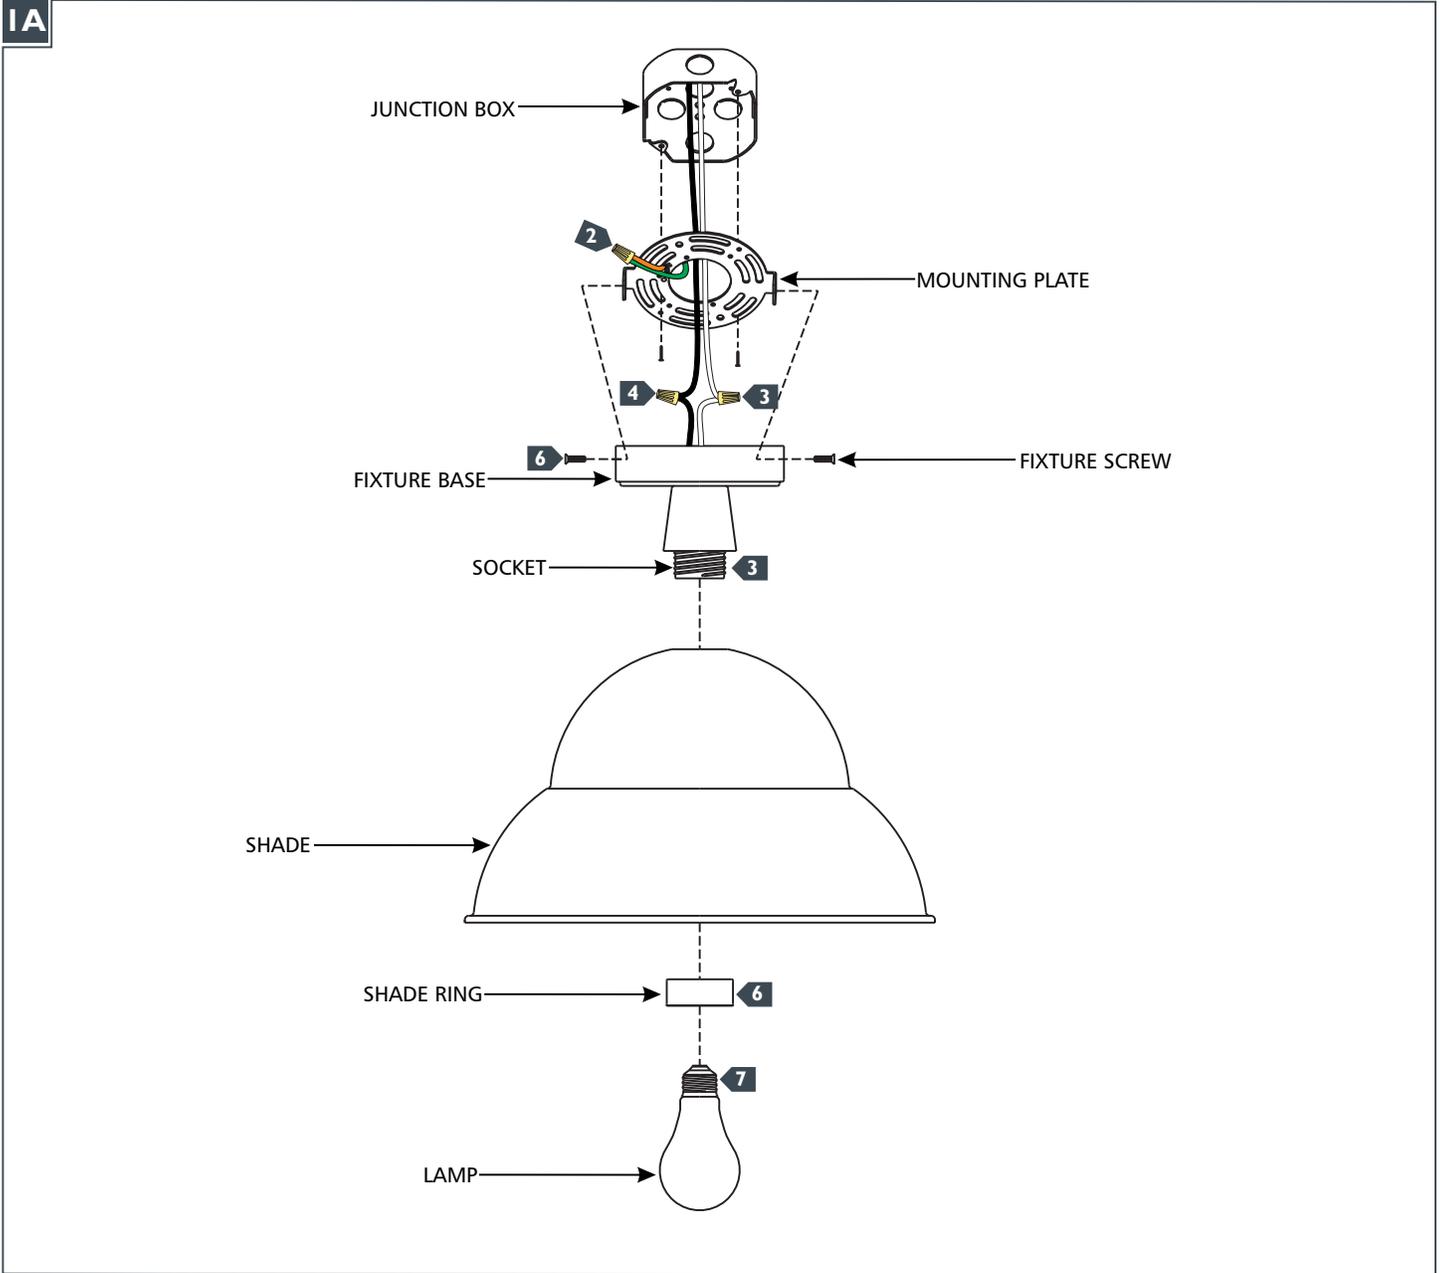

- 1 Secure the mounting plate to the junction box..
- 2 Connect the fixture to a suitable ground in accordance with local electrical codes.
- 3 Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 4 Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 5 Neatly place all the wires into the junction box or fixture base, place the fixture base onto the mounting plate, and secure it in place with the fixture screws.
- 6 Install the shade onto the socket and secure it in place with the socket ring.
- 7 Screw the lamp in to the socket. Refer to the label on the socket for Max Wattage information.