

Interlace Pendant

PD-47828 / PD-47839

dweLED
by WAC Lighting




Fixture Type:

Catalog Number:

Project:

Location:

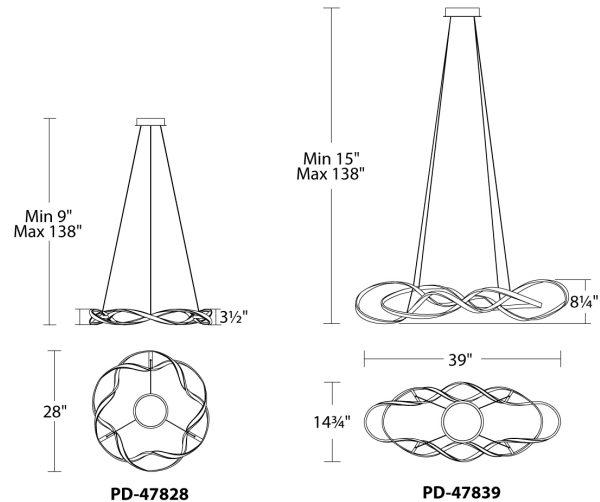

PRODUCT DESCRIPTION

Delicate bands of light weave playfully in and out on this flowing modern design. A continuous construction, a flexible diffuser, and powered aircraft cable suspension complete an overall clean, seamless look.

FEATURES

- Two seamless interlocked loops
- Thin powered cables provide an ultra-clean look
- Can be mounted on a sloped ceiling
- Universal voltage driver (120V-220V-277V) concealed within canopy

SPECIFICATIONS

Color Temp: 3000K

CRI: 90

Dimming: 100%-10% ELV; 100%-5% 0-10V

Rated Life: 54,000 hrs

Input: 120V – 277V

Construction: Aluminum with composite diffuser

Finish: Chrome

Standards: ETL & cETL listed, Damp listed, Title 24

ORDER NUMBER

Model	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
PD-47828	28" 57W	120V-277V	4853	3263	CH Chrome
PD-47839	39" 57W		4734	3241	

Example: PD-47839-CH

dweLED.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760