

WAC LIGHTING

Icon

Outdoor Wall Sconce 3000K

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model & Size	Color Temp & CRI	Finish	Watt	LED Lumens	Delivered Lumens
WS-W54614 14"	3000K 90	AL Brushed Aluminum BK Black BZ Bronze	10.9W	845	458

Example: **WS-W54614-BZ**

For custom requests please contact customs@waclighting.com

DESCRIPTION

Like a simple reference to something greater, the up and down lights accentuate linear architectural forms. A simple shape, with infinite applications, the Icon features a shielded light source for great low-glare illumination. Constructed with a solid die-cast aluminum and powder coated finish. The light engine is factory sealed for maximum protection against the

FEATURES


- Weather resistant powder coat finish
- Simple shape, simple idea, infinite applications
- Up & down light
- Shielded light source for great low-glare illumination
- Driver concealed within the fixture
- 5 year warranty

SPECIFICATIONS

Color Temp:	3000K
Input:	120-277 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100-10%
Rated Life:	54000 Hours
Mounting:	Can be mounted on wall in all orientations
Standards:	ETL, cETL, IP65
	Wet Location Listed
Construction:	Aluminum hardware with glass diffuser



FINISHES:




Brushed
Aluminum

Black

Bronze

LINE DRAWING:



Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Icon

Outdoor Wall Sconce 3000K

Model & Size	Color Temp & CRI	Finish	Watt	LED Lumens	Delivered Lumens
WS-W54620 20"	3000K 90	AL Brushed Aluminum BK Black BZ Bronze	11.1W	847	478

Example: **WS-W54620-BZ**

For custom requests please contact customs@waclighting.com

DESCRIPTION

Like a simple reference to something greater, the up and down lights accentuate linear architectural forms. A simple shape, with infinite applications, the Icon features a shielded light source for great low-glare illumination. Constructed with a solid die-cast aluminum and powder coated finish. The light engine is factory sealed for maximum protection against the

FEATURES


- Weather resistant powder coat finish
- Simple shape, simple idea, infinite applications
- Up & down light
- Shielded light source for great low-glare illumination
- Driver concealed within the fixture
- 5 year warranty

SPECIFICATIONS

Color Temp:	3000K
Input:	120-277 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100-10%
Rated Life:	54000 Hours
Mounting:	Can be mounted on wall in all orientations
Standards:	ETL, cETL, IP65
	Wet Location Listed
Construction:	Aluminum hardware with glass diffuser



FINISHES:




Brushed Aluminum

Black

Bronze

LINE DRAWING:

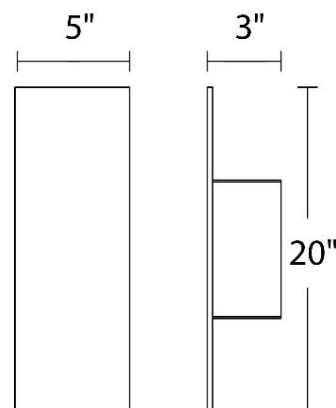

WS-W54620