

Collection: KORA


Installation manual for:

LD5016D13 D13"H10. 9"L3

## Installation instructions:

- 1.Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
- 2. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
- 3."E" wire from the fixture is attaced to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
- 4. Secure mounting bracket to the junction box.
- 5.Insert screws(P2) in side of top unit the mounting bracket.
- 6. Fix the loop (P3) to screw tube, then cover the canopy (P4) and fix it by canopy ring(P5).
- 7. Hanging crystal string (A-B-A-B... ...) on lampbody(P11).
- 8.Install the bulbs(not included) into the lamp fixture.

## The end!

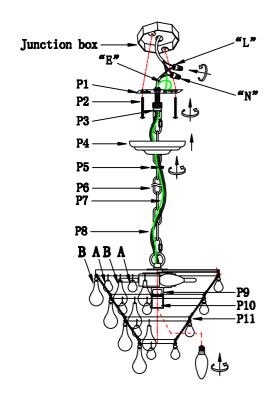

## PARTS LIST

part	picture	Description	Qty	Check	list
P1		L4" Mounting bracket	1		
P2	_	5/32-32 Screw	2		
Р3	•	Canopy loop (Canopy part)	1		
P4		Ø5.3″ canopy plat	1		
P5		Canopy ring (Canopy part)	1		
P6		L59"CHAINO4P Plain Design	1		
P7	\ \ \	ground wire	1		
P8	\ \ \	Power Cord 79" SPT-1-18# Clear	1		
P9		D1.2"*L2" metal lampcap	3		
P10		E12 lampholder	3		
P11		D11.8"*H8.8" lampbody	1		
A	<b>₿</b>	H1.2" Crystal	40		
В		H2.4" Crystal	40		

"L" = Hot wire
"N" = Neutral wire

"E" = Ground wire