

Sevier Downlight Outdoor Wall

8338701, 8338751 | 1.0

GENERATION LIGHTING

WALL

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for wet locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.


GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 160077

800.969.3347

www.generationlighting.com


© 2020 Generation Lighting. All rights reserved.
The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.

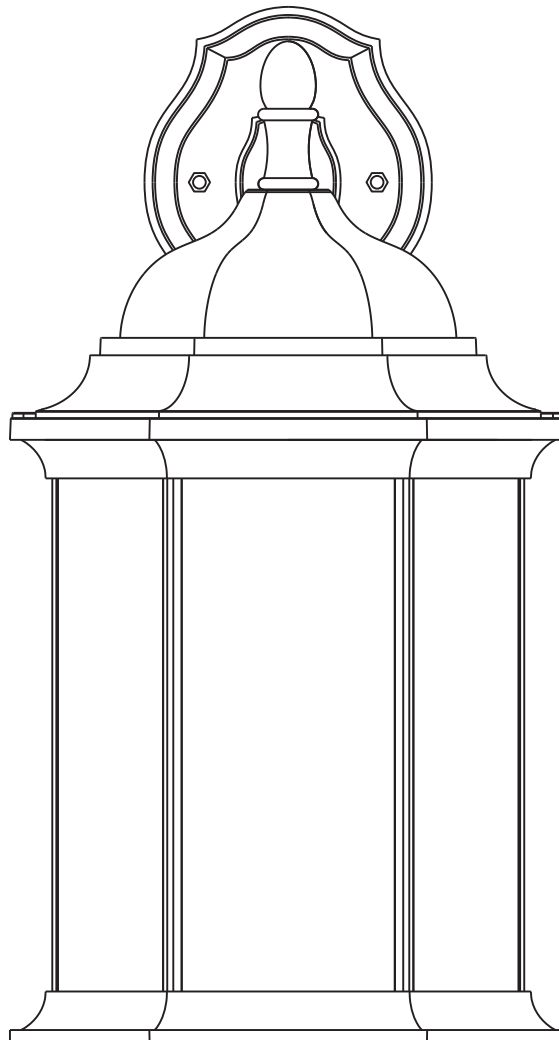

SAVE THESE INSTRUCTIONS!

Install the Fixture

IA

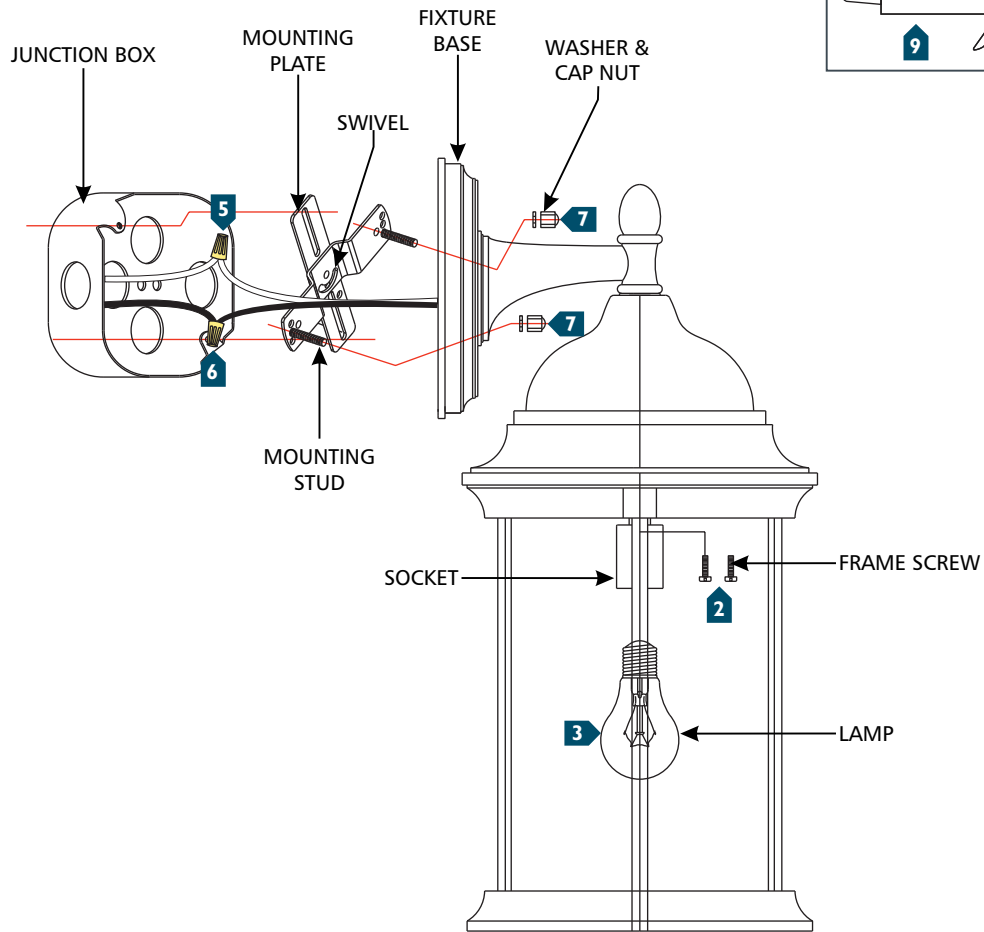

- 1 Secure the mounting plate to the junction box.
- 2 Install the frame to the fixture using the two frame screws.
- 3 Screw the lamp into the socket. Refer to the label on the socket for Max Wattage Information.
- 4 Connect the fixture to a suitable ground in accordance to local electrical codes.
- 5 Connect the white fixture wire to the neutral power line wire with a wire nut.
- 6 Connect the black fixture wire to the hot power line wire with a wire nut.
- 7 Align and place the fixture base onto the mounting studs, then secure it with the washers and cap nuts. **NOTE: Use the swivel on the mounting plate to adjust position as necessary.**
- 8 Screw the lamp into the socket. Refer to the label on the socket for Max Wattage Information.
- 9 For wet locations, caulk around the base of the fixture with waterproof construction sealant.