Collection:Baxter
Installation manual for:

LD2212BK D9.8″H9.9″L1

Installation instructions:

1. Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
2. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
3. "E" wire from the fixture is attaced to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
4. Secure mounting bracket to the junction box.
5. Insert screws(P2) in side of top unit the mounting bracket.
6. Fix the Mounting bracket(P1) to the Canopy and tighten by the screws(P4).
7. Fit lampshade(P12) with lampholder ring(P14).
8. Install the bulbs into the lamp fixture.(Bulb not included).

The end!

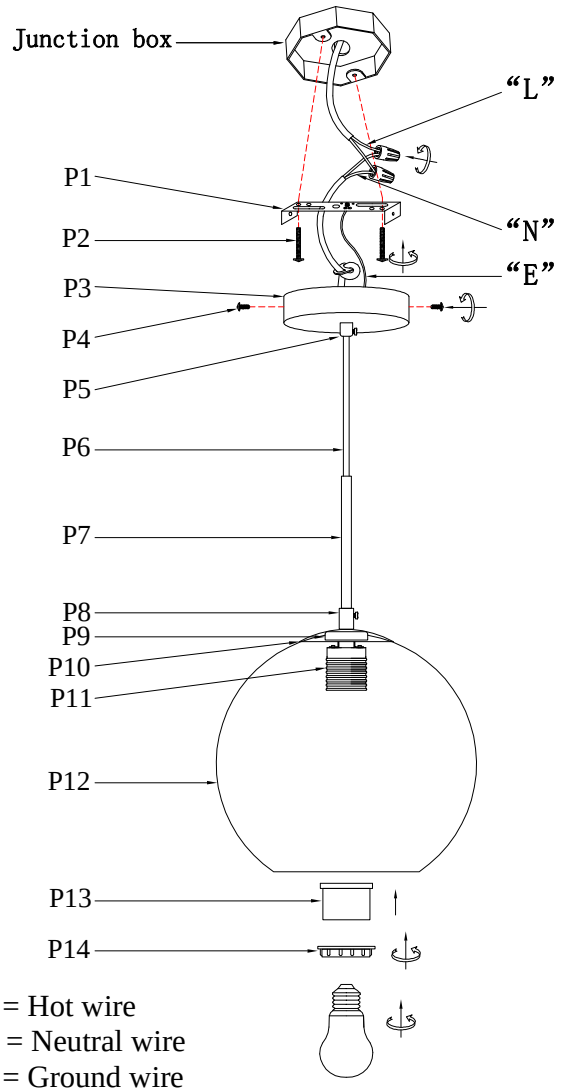

"L" = Hot wire
"N" = Neutral wire
"E" = Ground wire

PARTS LIST

part	picture	Description	Qty	Check list
P1		L4.5″ Mounting bracket	1	
P2		5/32-32 Screw	2	
P3		ø4.7″ Metal Canopy	1	
P4		M4 Screw	2	
P5		Wire lock	1	
P6		Power Cord 60″ 18# Black	1	
P7		L5.1″ Metal Tube	1	
P8		Wire lock	1	
P9		ø1.6″ Metal Cover	1	
P10		ø3.5″ Metal Cover	1	
P11		E26 Lampholder	1	
P12		ø9.8″Lampshade	1	
P13		ø2″ Metal Tube	1	
P14		E26 Lampholder Ring	1	