


## ASSEMBLY INSTRUCTIONS

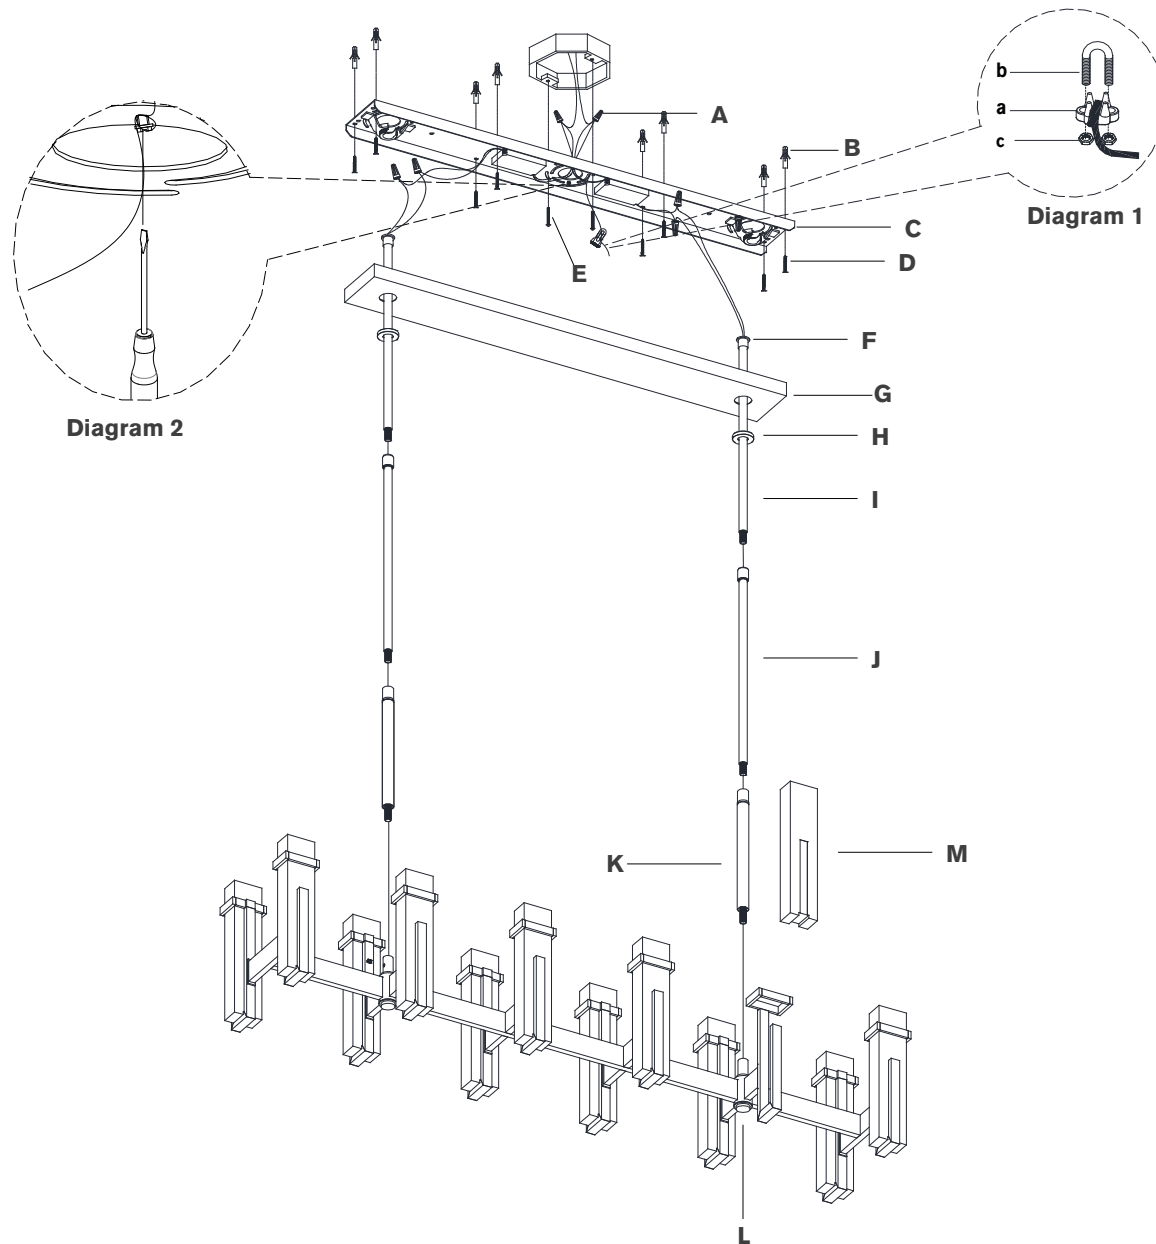

## Malik Large Linear Chandelier

Item # S 5915

### NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

### TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver	Slotted Screwdriver	Wire Strippers
Wire Cutters	Hammer	Pencil
Drill		

### PERSONS REQUIRED: Two


- Carefully remove all parts from the box. Place on a clean, soft surface.
- Remove mounting plate (C) from canopy (G) by removing collar ring (H).
- Using the mounting plate (C) as a guide, line up with the junction box and mark anchor positions.
- Using a drill bit slightly smaller than the anchor, drill holes in the marked positions. Install anchors (B) into the holes using hammer.
- Install mounting plate (C) to junction box and secure with mounting screws (E), then secure wood screws (D) to anchors (B).
- Feed fixture wires and safety cable through stems (K) and connect to fixture body (L).
- Feed fixture wires and safety cable through bottom rods (J) and connect to stems (K).
- Continue feeding wires and safety cable through collar ring (H), canopy (G) and top rod (I).

**NOTE:** It is recommended to have a helper assist in supporting the fixture for steps 9-10.

- Holding fixture upright, slide collar ring (H) and canopy (G) down stems (K) and rest on fixture body (L). Then connect top rods (I) to bottom rods (J).

**NOTE:** Slide components down slowly to avoid damages.

## ASSEMBLY INSTRUCTIONS

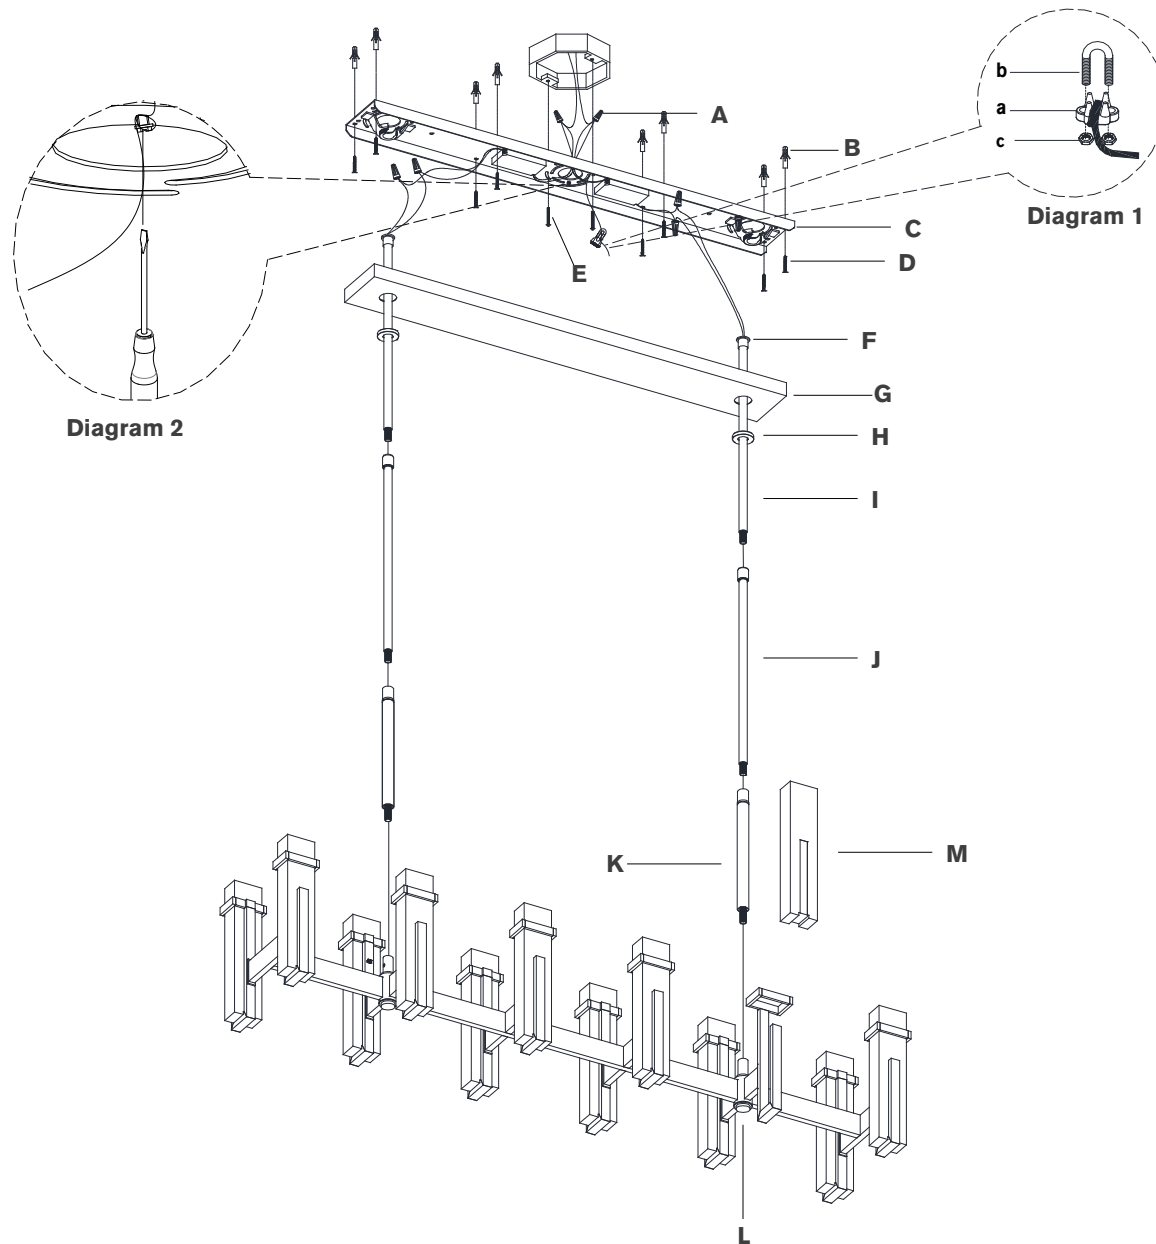

## Malik Large Linear Chandelier

Item # S 5915

### NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

10. Hang fixture swivel ball **(F)** to mounting plate **(D)**.
11. Cut excess wires, being sure to leave enough length to reach the junction box.
 

**NOTE:** : Separate black and red wires, and strip insulation on each 5/8".
12. Run support cable through junction box and around the mounting plate **(C)**. Wrap the support cable around the saddle **(a)**, and secure with u-bolt **(b)** and hex nuts **(c)** as shown in diagram 1.
13. Connect fixture neutral wire (black) to the driver output neutral wire (black) using wire nut **(A)**.
14. Connect fixture hot wire (red) to the driver output hot wire (red) using wire nut **(A)**.
15. Connect supply ground wire (usually green or bare copper) around the green grounding screw (see diagram 2). Tighten.
 

**NOTE:** It is imperative that the fixture is grounded.
16. Connect driver input neutral wire (white) to the supply neutral wire (usually white) using wire nut **(A)**.
17. Connect the driver input hot wire (black) to the supply hot wire (usually black) using wire nut **(A)**.
 

**CAUTION:** Do not reverse the hot and neutral connections.
18. Make sure all wire connections are tight, then carefully tuck into the junction box.
19. Install canopy **(G)** to mounting plate **(C)** by securing with collar ring **(H)**.
20. Insert shades **(M)** into fixture body.

**Care Instructions:** Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.